


PRODUCT SPECIFICATIONS
CAT5E RJ45 U/UTP Keystone Coupler

Construction

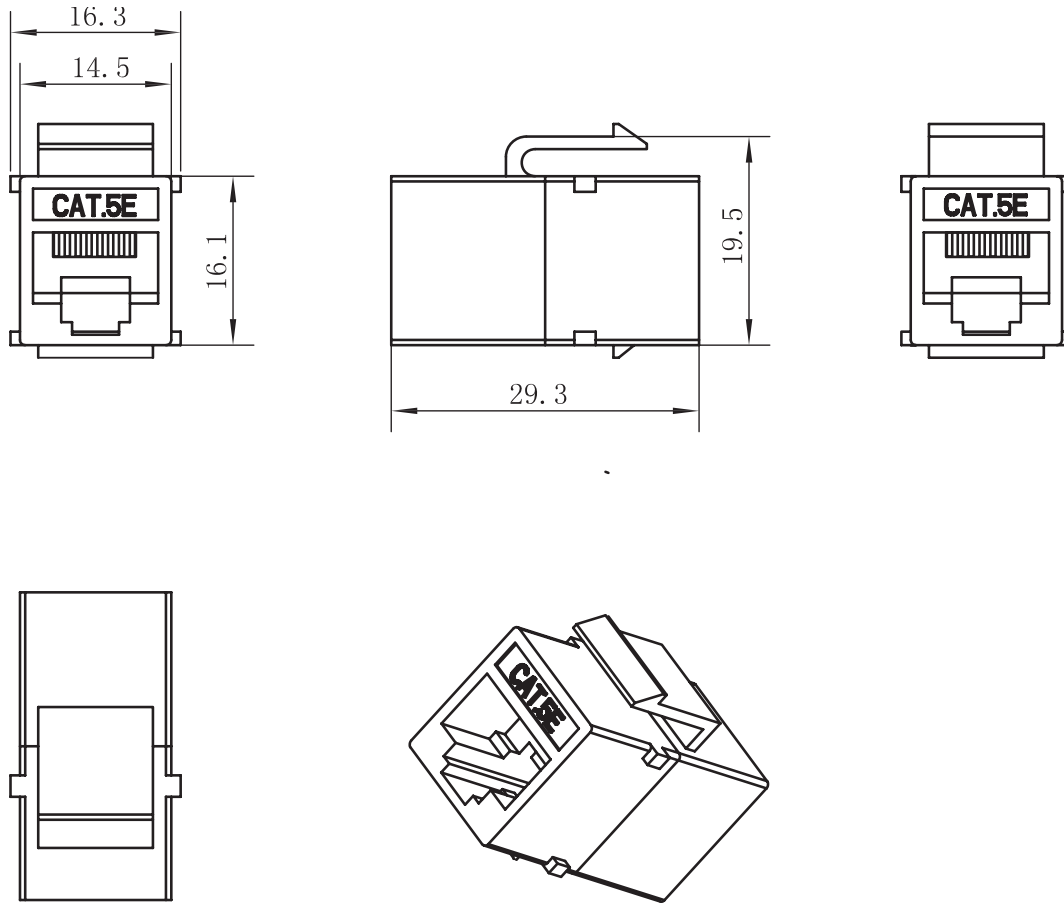

COMPLIANCE & CERTIFICATIONS

RoHS ANSI/TIA/EIA 568 Standard

SPECIFICATIONS

MATERIAL

- 1. Plastic Housing: ABS
- 3. RJ45 Contact Material & Finished:
 - 2-1. Phosphor Bronze with Nickel Plated
 - 2-2. Contact Area: Gold Plated

PERFORMANCE

- a. Insertion Force: 900 gms for 8 Contacts
- b. Retention Strength: 7.7 kgs Between Jack & Plug
- c. Operation Temperature: -30° to 68°
- d. Durability:
 - d-1. Jack: 750 Cycles Plug-Jack Mating and Unmating test, Insertion Cycles at 20 Cycles/Minute Max. Contact Resistance per 100 Cycles.
 - d-2. IDC: Max. 200 Punching Times
- e. The CAT5E Performance is in Compliance with the ANSI/TIA/EIA 568 C Standard

NOTE: TECHNICAL SHEETS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

PART NUMBER

AVAILABLE COLOR

MKJ5U-01349	Black
MKJ5U-03669	White

REV. 20160115.1