


PRODUCT SPECIFICATIONS
CAT6 RJ45 U/UTP Keystone Coupler

Construction

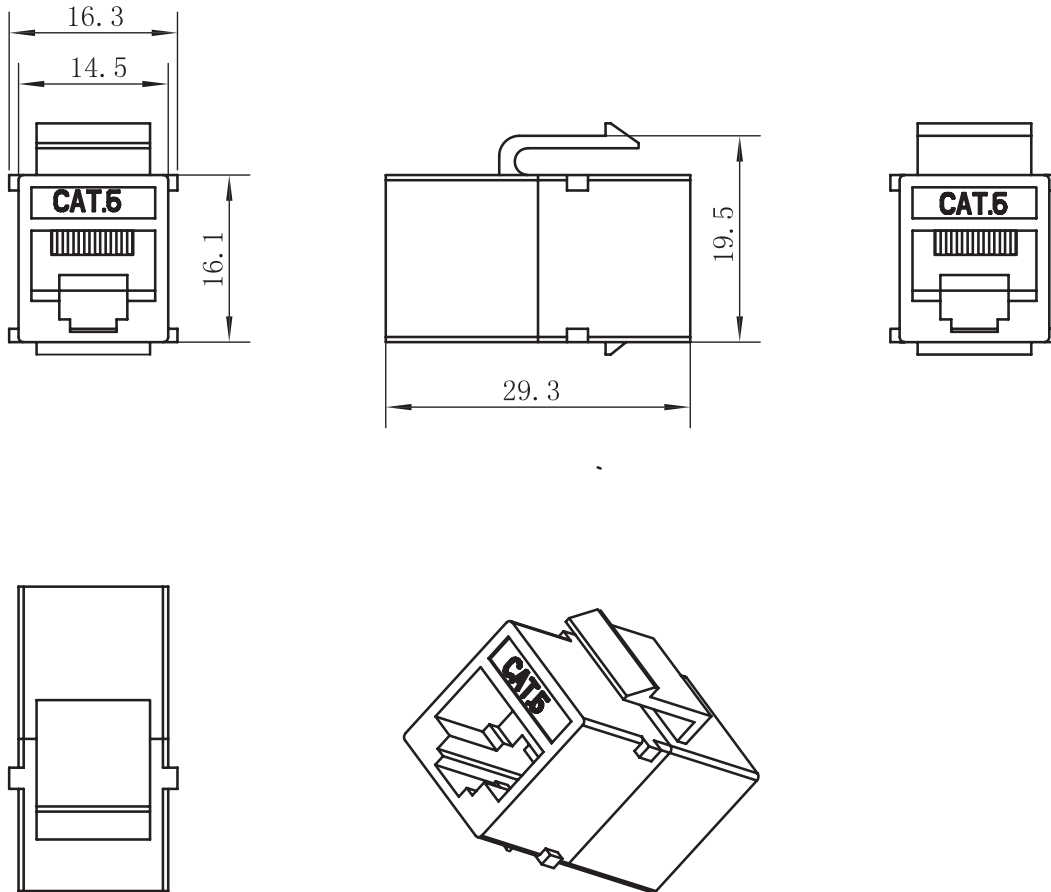

COMPLIANCE & CERTIFICATIONS	
RoHS	ANSI/TIA/EIA 568 Standard
SPECIFICATIONS	
MATERIAL	PERFORMANCE
1. Plastic Housing: ABS 3. RJ45 Contact Material & Finished: 2-1. Phosphor Bronze with Nickel Plated 2-2. Contact Area: Gold Plated	a. Insertion Force: 900 gms for 8 Contacts b. Retention Strength: 7.7 kgs Between Jack & Plug c. Operation Temperature: -30° to 68° d. Durability: d-1. Jack: 750 Cycles Plug-Jack Mating and Unmating test, Insertion Cycles at 20 Cycles/Minute Max. Contact Resistance per 100 Cycles. d-2. IDC: Max. 200 Punching Times e. The CAT6 Performance is in Compliance with the ANSI/TIA/EIA 568 C Standard
PART NUMBER	AVAILABLE COLOR
MKJ6U-01352	Black
MKJ6U-03670	White

NOTE: TECHNICAL SHEETS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

REV. 20160115.1