




**PRODUCT SPECIFICATIONS**  
22 AWG / 2 Conductor Security Cable Solid

COMPLIANCE			
RoHS	c(UL)us Listed		
SPECIFICATIONS			
NEC/(UL) Specification Cl3R			
C(UL) Specification CMR			
EU Directive 2002/95/EC (RoHS)			
CERTIFICATIONS			
UL Listed Type CL3R			
C(UL) Type CMR			
PHYSICAL SPECIFICATIONS	ELECTRICAL CHARACTERISTICS		
Color Code	Black, Red	Nominal Capacitance (Pf/m)	17
Conductor Material	Solid Bare Copper	Nominal Impedance (Ohms)	95
AWG	22	Nominal Conductor DC Resistance DCR@20°C (ohm/ft)	16.5
Conductor Diameter (mm)	0.64	Maximum Operating Voltage-UL (Voltage)	300 V
Conductor Stranding	N/A	MECHANICAL CHARACTERISTICS	
Insulating Material Type	PVC Riser	Operating Temperature Range	-20°C to 60°C
Insulation Average Thickness (mm)	0.23	PART NUMBER	LENGTH
Insulation Diameter (±0.05 mm)	1.1	SA222-03345	1000 ft Pull Box
Jacket Color	Gray		
Jacket Average Thickness (mm)	0.36		
Jacket Material Type	PVC Riser		
Out Diameter (±0.05 mm)	2.6		
Ripcord	Nylon		
Total Cable Weight (lbs/1000 ft)	9		

Cross Section:

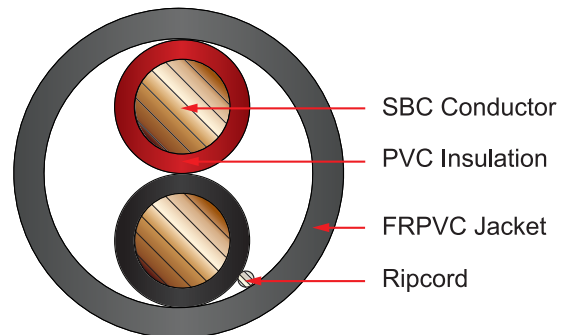

**CABLE MARKING**  
VERICOM SECURITY CABLE 22 AWG 2C SOLID (UL) E346149-T CL3R 75C  
RoHS 0000FT USED / 1000 FT REMAINING

NOTE: TECHNICAL SHEETS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

REV.20170804.2