


PRODUCT SPECIFICATIONS

18 AWG 2 CONDUCTOR SHIELDED SOLID CMR FIRE ALARM CABLE

COMPLIANCE	
RoHS Compliant	UL Listed
SPECIFICATIONS	
UL1424, Power Limited Fire Alarm Circuit Cable	
UL 13, Power Limited Circuit Cable	
UL1666, Riser Flame Tested	
NEC Article 725, 760 and 800	
CERTIFICATIONS	
UL Listed Type FPLR / CL3R / CMR	
PHYSICAL SPECIFICATIONS	
Cable Construction	18 AWG 2C Shielded
Conductor Material	SBC
Insulation Material / Insulation Wall Thickness	PVC / 0.01 in.
Insulation Color Code	Black, Red
Ripcord	Yes
Shielding Material	Aluminum Foil
Drain Wire (# Strands / AWG)	Stranded Tinned Copper (7 / 32 AWG)
Jacket Material / Jacket Wall Thickness	FRPVC / 0.015
Jacket Color	Red
Jacket Flame Rate	CMR
Overall Temperature Rating	75° C
Temperature Range	-10° C to 75° C
Cable Weight	20.5 lb / 1000 ft
ELECTRICAL CHARACTERISTICS	
Voltage Rating	300 V
Nominal Mutual Capacitance	40.43 pF/m
DC Resistance	6.53 Ω / 1000 ft

PART NUMBER	PACKAGING	LENGTH
SF182-04413	Spool	1000 ft

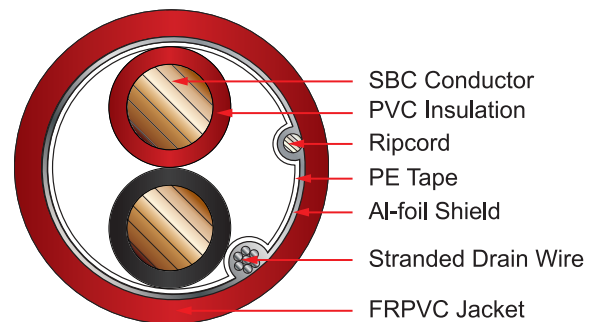

CABLE MARKING

VERICOM SHIELDED FIRE ALARM (UL) E364603-T 18 AWG 2 COND SOLID 75C TYPE FPLR OR CL3R --- CMR ROHS 0000FT USED / 1000FT REMAINING

NOTE: TECHNICAL SPECS AND IMAGES ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Rev.20170713.2