




## CAT5e Snagless UTP Patch Cable

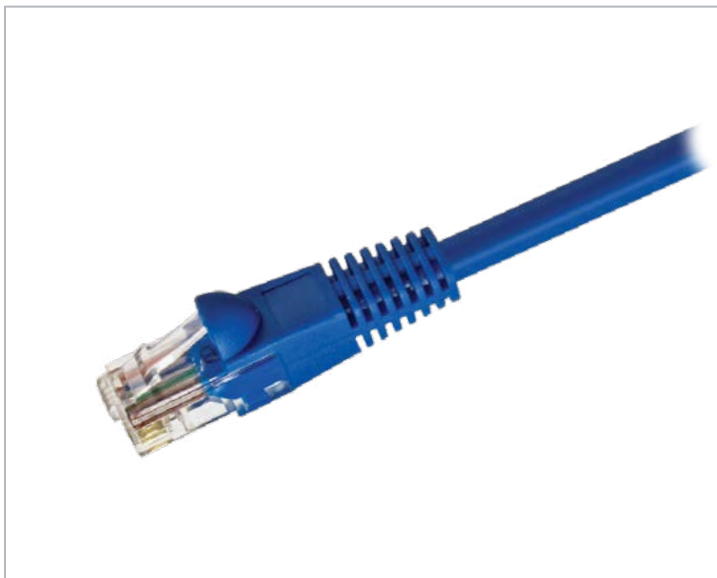

### Applications

The Vericom Category 5e Snagless Unshielded Patch Cables support 1000BASE-T (Gigabit Ethernet), 100BASE-T (Fast Ethernet), DSL, cable modem and telecommunications.

### Description / Specifications

Vericom Category 5e Snagless Unshielded Patch Cables are designed to meet and exceed ANSI/TIA-568-C.2 Category 5e and ISO 11801 Class D electrical performance requirements for frequencies up to 100 MHz and are tested up to 350 MHz. The patch cables utilize 24AWG stranded copper conductors in a four pair unshielded configuration for maximum durability. These patch cables are rated CM and meet applications up to 1000Base-T Ethernet with RJ-45 modular plugs.

### Features & Benefits

- Snagless cable design with molded strain relief boots for ease of use
- Pre-installed standard RJ-45 unshielded plug design with gold plated brass contacts for reliability
- Stranded conductors with a 0.21" jacket diameter
- Available in Blue or White in multiple lengths

### Standards Compliance

- ISO/IEC 11801
- TIA/EIA-568-C.2
- RoHS Compliant

### Construction

**Assembly:** 4 twisted pairs, stranded 24 AWG, UTP

**Insulation:** Polyethylene (PE)

**Jacket Dimensions:** Nominal Diameter 0.21 in (5.3 mm)

**Material:** PVC

**Connector Type:** CAT5e Male RJ45

**Plug Housing:** UL94V-2 Clear Polyester

**Boot:** Snagless Molded PVC

**Contacts:** Brass, Gold Plated

### Environmental Conditions

**Operating Temperature:** 14 °F to 167 °F (-10 °C to 75 °C)

**Plug Insertion Lifespan:** > 1000




CAT5e Snagless UTP Patch Cable

Ordering Information

Description		
CAT5e Patch Cable, U/UTP, 24 AWG, 4 Pair, Snagless		
Cable Marking		
4P Patch Cable CAT5E UTP ISO/IEC 11801 & EN 50288 & TIA/EIA 568C.2		
Length	Blue	White
1 ft.	XPC5U-00135	XPC5U-00124
2 ft.	XPC5U-00136	XPC5U-00125
3 ft.	XPC5U-00137	XPC5U-00126
4 ft.	XPC5U-02581	XPC5U-02641
5 ft.	XPC5U-02582	XPC5U-02642
6 ft.	XPC5U-00138	XPC5U-00127
7 ft.	XPC5U-02583	XPC5U-02643
10 ft.	XPC5U-02584	XPC5U-02644
15 ft.	XPC5U-00141	XPC5U-00130
25 ft.	XPC5U-00142	XPC5U-00131
50 ft.	XPC5U-00144	XPC5U-00133

Technical Illustration

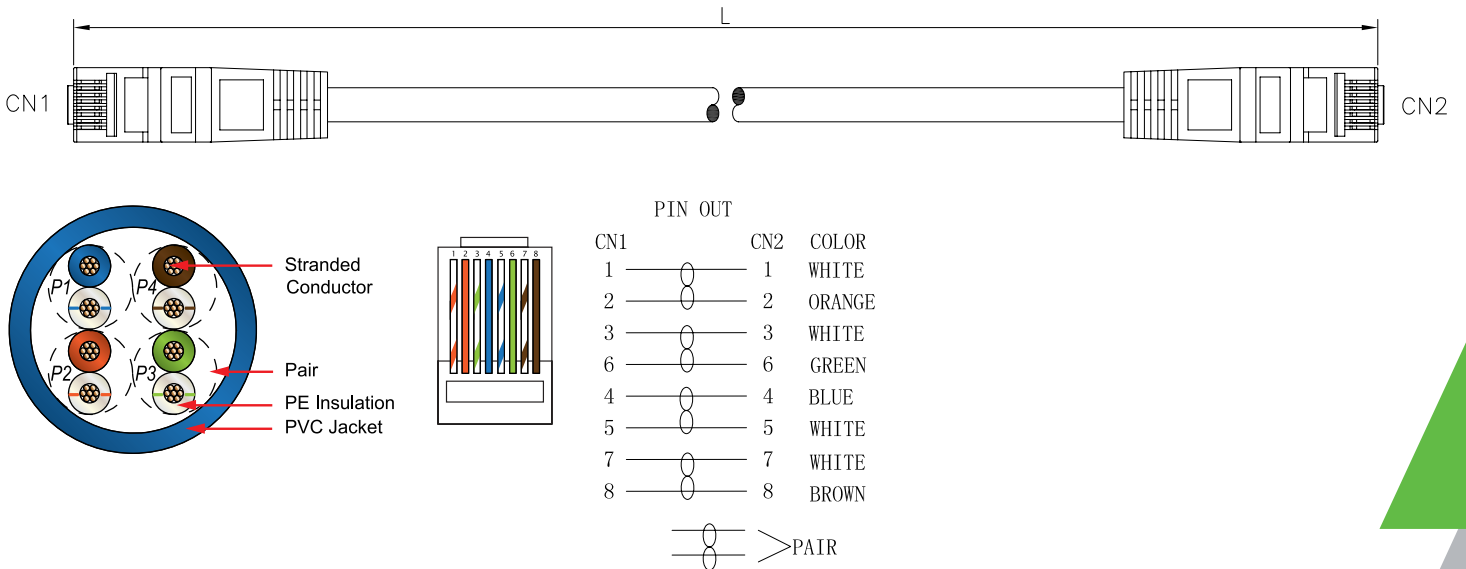

TECHNICAL SHEETS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

REV.20250102.7