




## 2 Conductor Stranded Landscape Cable

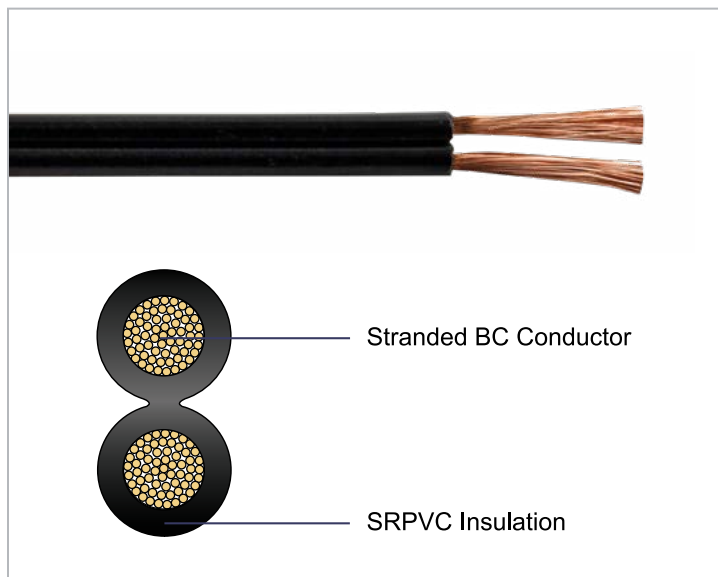

### Features & Benefits

- Suitable for underground low energy circuit style applications
- UL Listed and RoHS compliant to ensure safety requirements are met
- Offered in either 12 AWG 2 conductor (65 strands per conductor) or 10 AWG 2 conductor (104 strands per conductor) to suit your specific application
- One leg has a raised ridge for polarity
- Wooden spool (500 ft) packaging to ease installation and storage
- Low voltage rated up to 150 volts

### Applications

Vericom 2 conductor stranded landscape cable supports low voltage outdoor accent lighting, landscape lighting and security lighting applications. This cable is suitable for direct burial.

### Description / Specifications

This 2 conductor stranded low voltage landscape cable is offered in 12 AWG or 10 AWG, and is composed of 2 very flexible high strand bare copper conductors within a sunlight resistant PVC insulation. This low-voltage landscape cable is ideal for use at temperatures from -20°C up to a maximum of 60°C and is approved for 150 volts.

### Standards Compliance

- UL Listed
- NEC Compliant (see NEC Tables 11A & 11B)
- RoHS Compliant



## 2 Conductor Stranded Landscape Cable

### Ordering Information

Description		Packaging
<b>2 Conductor Stranded Landscape Cable</b>		<b>500 ft Wooden Spool</b>
Item No.	Conductor	Cable Weight
LW122-04421	12 AWG Stranded	34 lb / 500 ft
LW102-04422	10 AWG Stranded	53 lb / 500 ft

### Cable Marking

VERICOM E-479172 **XX** AWG (UL) UNDERGROUND LOW ENERGY CIRCUIT CABLE 150V AC SUNLIGHT RESISTANT

For accurate cable marking, replace the **XX** with the appropriate wire gauge.

### 12 AWG Construction

**Conductor Material:** 12 AWG 2C Stranded Bare Copper  
**Nominal Dimensions:** 0.390 in. x 0.195 in. (9.91 mm x 4.95 mm)  
**No. of Strands Per Conductor:** 65  
**Insulation Color:** Black

**Insulation Material:** Sunlight Resistant Polyvinyl Chloride (SR-PVC)  
**Rating:** Direct Burial  
**Insulation Thickness:** 0.045 in. (1.143 mm)  
**Cable Marked For Polarity:** Yes

### 10 AWG Construction

**Conductor Material:** 10 AWG 2C Stranded Bare Copper  
**Nominal Dimensions:** 0.440 in. x 0.220 in. (11.18 mm x 5.59 mm)  
**No. of Strands Per Conductor:** 104  
**Insulation Color:** Black

**Insulation Material:** Sunlight Resistant Polyvinyl Chloride (SR-PVC)  
**Rating:** Direct Burial  
**Insulation Thickness:** 0.045 in. (1.143 mm)  
**Cable Marked For Polarity:** Yes

### Electrical

**Max Voltage Rating:** 150V  
**Max Amps:** See NEC tables 11A & 11B

**Max Wattage:** See NEC tables 11A & 11B

### Environmental Conditions

**Operating Temperature:** -4 °F to 140 °F (-20 °C to 60 °C)