


### **Vertical Trough Cable Manager**

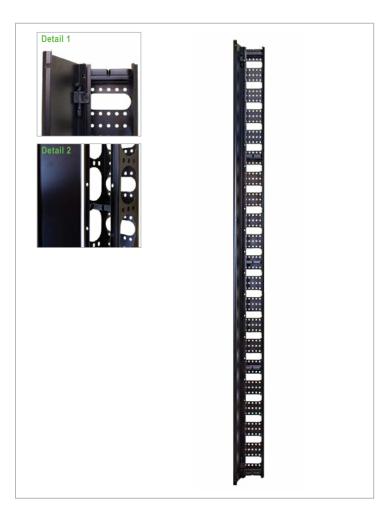

#### **Description**

Our Vertical Trough Cable Manager is a great solution for low-density rack installations and can also be installed inside 31.5" wide network cabinets. This versatile design features a solid hinged door, pass-through openings along three sides, and plastic retaining clips inside the trough.

#### **Product Specifications**

Product Type: Vertical Trough Cable Manager

Base Material: Powder Coated 16 Gauge Cold Rolled Steel

No. of Hinged Covers: 2

Cover Material: Steel

Dimensions (HxWxD): Varies By Item Number

Individual Retaining Clip Dims (WxD): 2.78" x 1.40"

Rack Unit Quantity: Varies By Item Number

Cable Capacity: See Chart Below

Cable Pass-Through Openings: Yes

Mounting Hardware: Included

**Quantity Per Package:** 1 (Sold Individually)

Compliance: RoHS

### **Ordering Information**

| Item #  | Rack  | Dimensions             | Cable Capacity (Based on a 50% Fill Rate) |       |      |       |  |  |  |  |  |
|---------|-------|------------------------|---|-------|------|-------|--|--|--|--|--|
| item#   | Units | (HxWxD)                | Fiber                                     | CAT5e | CAT6 | CAT6A |  |  |  |  |  |
| RAMVT42 | 42U   | 70.87" x 3.75" x 3.15" | 173                                       | 67    | 43   | 23    |  |  |  |  |  |
| RAMVT45 | 45U   | 77.87" x 3.75" x 3.15" | 173                                       | 67    | 43   | 23    |  |  |  |  |  |
| RAMVT48 | 48U   | 84.87" x 3.75" x 3.15" | 173                                       | 67    | 43   | 23    |  |  |  |  |  |
| RAMVT52 | 52U   | 91.87" x 3.75" x 3.15" | 173                                       | 67    | 43   | 23    |  |  |  |  |  |

TECHNICAL SHEETS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

REV.20250110.2






# **Vertical Finger Duct Cable Manager**

| Techni   | ical [ | )rawi  | ng - 2  | 2D Vi  | ew      |        |        |   |     |  |  |  |     |   |    |            |
|----------|--------|--------|---------|--------|---------|--------|--------|---|-----|--|--|--|-----|---|----|------------|
|          |        |        |         |        |         |        |        |   |     |  |  |  |     | [ |    |            |
|          |        |        |         |        |         |        |        |   |     |  |  |  |     |   |    |            |
|          |        |        |         |        |         |        |        |   |     |  |  |  |     |   |    |            |
|          |        |        |         |        |         |        |        |   |     |  |  |  |     |   |    | 3.15" [80  |
|          |        |        | )°(     |        | 000     | );(    |        |   | ):( |  |  |  | ):( |   | ): |            |
|          |        |        |         |        |         |        |        | ı |     |  |  |  |     |   |    |            |
|          |        |        |         |        |         |        |        |   |     |  |  |  |     |   | -  | -          |
| echni    | ical F | )rawii | na - F  | Retair | nina (  | Clin F | )etail |   |     |  |  |  |     |   |    | 3.75" [95m |
|          |        |        | ilg - i | totan  | iiiig ( | onp L  | Ctan   |   |     |  |  |  |     |   |    |            |
| 40" [35. | .5mm   | J      |         |        |         |        |        |   |     |  |  |  |     |   |    |            |

## Technical Drawing - 3D View

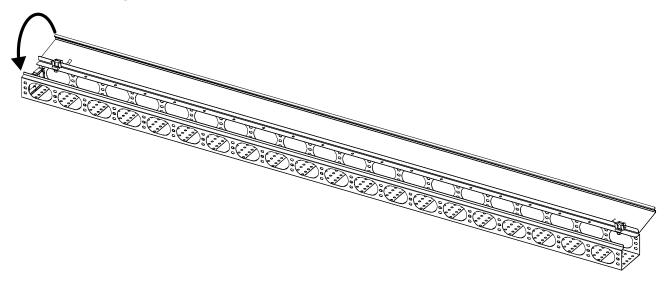

TECHNICAL SHEETS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

2.78" [70.5mm]

REV.20250110.2