



## F-81 Keystone Modular Insert



### Applications

These F-81 keystone modular inserts snap-in to an open keystone port to create quick and easy connectivity for most satellite, cable, and CCTV applications.

### Description / Specifications

Vericom F-81 keystone modular inserts are molded out of proprietary impact resistant plastic and include a pre-installed F-81 connector. These modular inserts provide quick connection and support for a single F-81 coaxial cable connection. These inserts are designed to easily snap-in to a standard keystone port and are sold individually.

### Ordering Information

Description	
F-81 Keystone Modular Insert	
Item No.	Color
MKJ81-03434	White
MKJ81-03435	Ivory
MKJ81-03436	Light Almond

### Features & Benefits

- Pre-installed nickel-plated zinc alloy standard “F” connector
- Provides a clean finished appearance
- For Satellite TV, Cable TV and CCTV applications
- Modular snap-in/out design for temporary or long-term applications
- Impedance: 75 Ohms
- Maximum Frequency: 1.5 GHz
- Allows for mixed media installs in faceplates and patch panels
- Available in White, Ivory or Light Almond

### Related Products

Pair Vericom’s *MKJ81-03434*, *MKJ81-03425* and *MKJ81-03436* with the following items for wall mounting applications:

Single Gang Keystone Wall Plates  
Available in: White, Ivory, or Light Almond

- \*1 Port, White: Item No. XFPOP-00470
- 2 Port, White: Item No. XFPOP-00471
- 3 Port, White: Item No. XFPOP-00472
- 4 Port, White: Item No. XFPOP-03418
- 6 Port, White: Item No. XFPOP-03421

- 1 Port, Ivory: Item No. XFPOP-03588
- 2 Port, Ivory: Item No. XFPOP-03589
- 3 Port, Ivory: Item No. XFPOP-03590
- 4 Port, Ivory: Item No. XFPOP-03419
- 6 Port, Ivory: Item No. XFPOP-03422

- 1 Port, Light Almond: Item No. XFPOP-01452
- 2 Port, Light Almond: Item No. XFPOP-01453
- 3 Port, Light Almond: Item No. XFPOP-01454
- 4 Port, Light Almond: Item No. XFPOP-03420
- 6 Port, Light Almond: Item No. XFPOP-03423




\* Pictured



F-81 Keystone Modular Insert

Technical Drawing

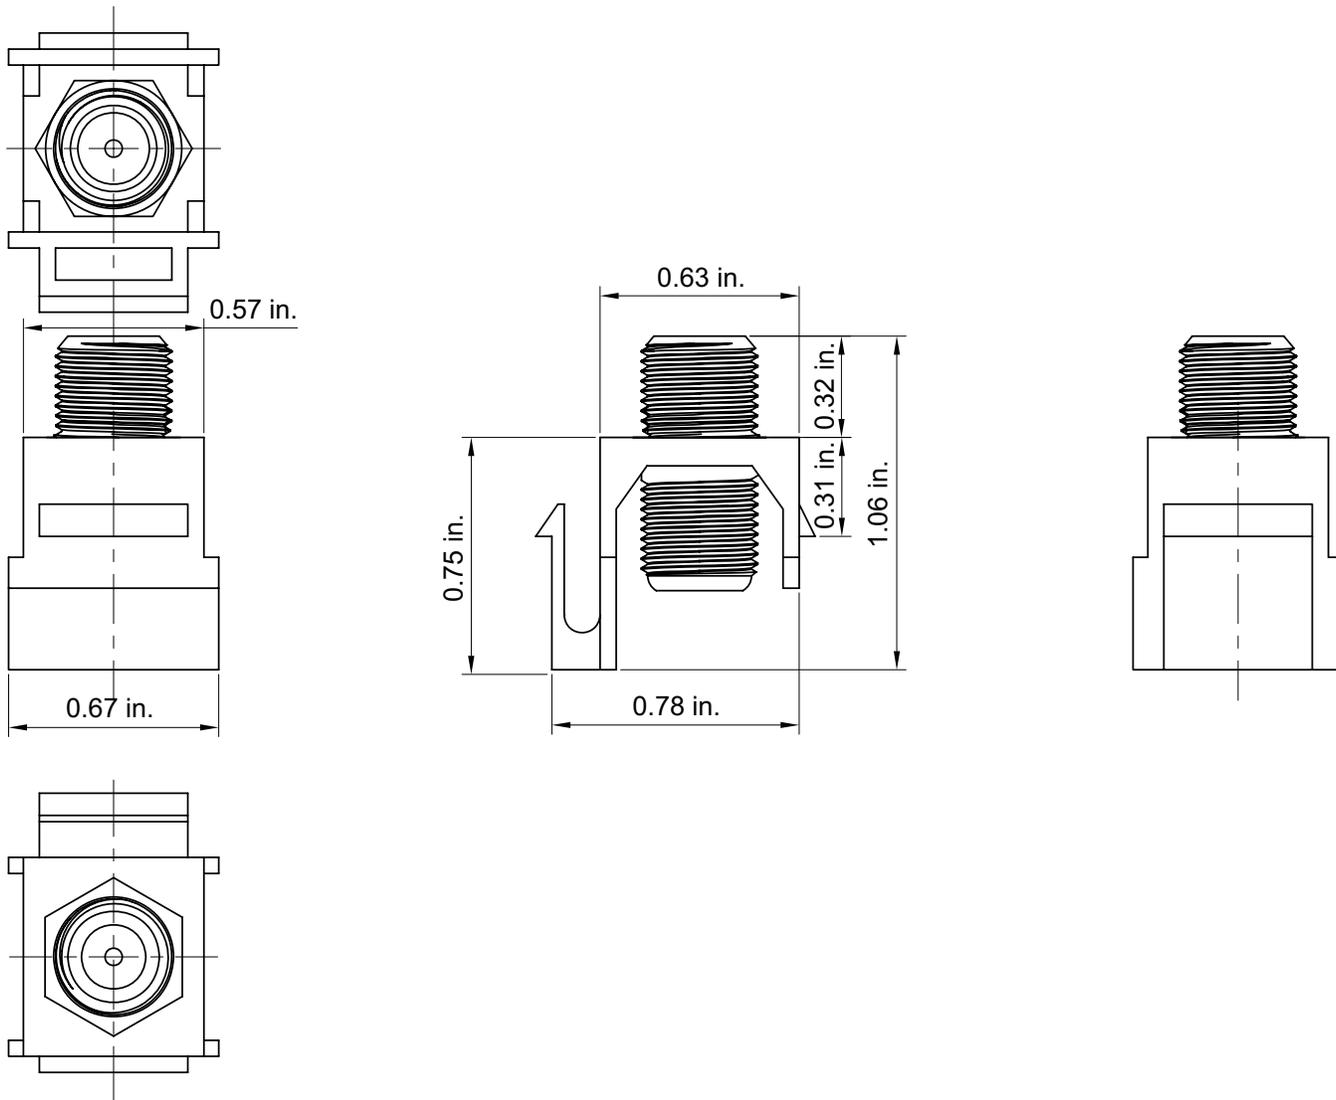

Physical Specifications

<b>Dimensions</b>	1.06 in. * 0.75 in. * 0.78 in.
<b>Material</b>	High Impact, Fire retardant ABS plastic rated UL94V-0
<b>Mounting</b>	Snap-In / Out
<b>Color</b>	White, Ivory or Light Almond (see ordering information)

TECHNICAL SHEETS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

REV.20250106.3