




Basic Rack Mount PDU - 15A, 100-120V, 1.4kW w/NEMA 5-15R

Description

Vericom Basic Rack Mount PDUs distribute reliable power to IT equipment in a wide variety of applications where intelligence and/or remote monitoring are not required.

VPB-5151415V features (14) NEMA 5-15R outlets protected by a single 15A circuit breaker, a reset button in the event of an overload, and a durable anodized aluminum chassis. A 10 ft power cord with a NEMA 5-15P plug connects to an external power supply, while the versatile mounting design allows outlets to face any of three directions.

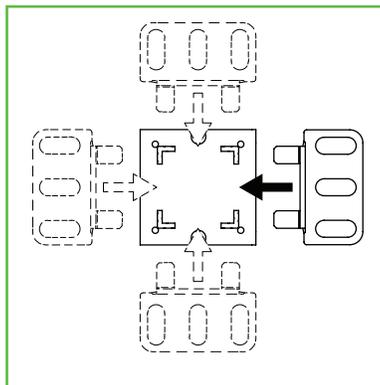

Product Features

- 14 NEMA 5-15R outlets
- Single 15A circuit breaker w/reset button
- Switchless design prevents accidental shutdowns
- Includes button mounts for vertical mounting to Vericom network and server cabinets, as well as toolless mounting brackets that allow outlets to face the front, rear, or side.
- Conforms to UL 60950-1 and is RoHS compliant



Basic Rack Mount PDU - 15A, 100-120V, 1.4kW w/NEMA 5-15R

OVERVIEW	
Item Number	VPB-5151415V
PDU Type	Basic
Form Factor	Vertical (zero U)
UPC Code	846788117321
OUTPUT	
Rated Output Voltage	120V Single Phase
Output Receptacles	(14) NEMA 5-15R
Overload Protection	(1) 15A Circuit Breaker
INPUT	
Rated Input Voltage	120V Single Phase
Max. Input Current	15A
Frequency	50/60 Hz
Power Capacity	1.4 kW
Plug Type	NEMA 5-15P
Cord Type	14/3 AWG
Cord Length	10 ft (3.05 meters)
PHYSICAL	
Unit Width	26.7 inches (679mm)
Unit Height	1.7 inches (44.0mm)
Unit Depth	1.7 inches (44.0mm)
Unit Weight	2.6 lbs (1.2 kgs)
Shipping Length	33.5 inches (851mm)
Shipping Width	3.0 inches (76.2mm)
Shipping Height	3.0 inches (76.2mm)
Shipping Weight	3.1 lbs (1.4 kgs)
Chassis Material	Anodized Aluminum (black)
Mounting Options	1) Pre-installed button mounts, and 2) Toolless 4-way mounting brackets
ENVIRONMENTAL	
Operating Temperature	30° to 140° F (0° to 60° C)
Operating Relative Humidity	0 - 95%
Operating Elevation	0 - 13,123 ft (4,000 meters)
SPECIAL FEATURES	
Breaker Reset	Push button on front
COMPLIANCE	
Certifications	Tested to conform to UL 60950-1; IEC 60950-1:2005 (Second Edition) + Am 1:2009 + Am 2:2013: CB Scheme RoHS
Warranty	2-year limited warranty